

Independent Anti-Ligature Services

Securing Safety By Reducing Ligature Points

Anti-ligature Sliding Indicator Sign (P5P-AL-SIS)

Product Features


- Fixes to the outside of the door (corridor side)
- Chamfered edges on all sides.
- Available in various colours. (Iridium Gold Metallic Standard)
- 2 finger dimples on slider for easy movement.
- Reduced tolerance of 0.35mm between sliding rails and track.
- Angled chamfer to the bottom edge on each track.
- Comes with 2Nr x security screws

Installation

- Surface around the reader must be clean and clear of any debris.
- The Sign **must not** bridge any gaps in the substrate.
- Any holes in the substrate prior to installation must be filled and allowed to harden and sanded smooth before securing the Shroud.
- Level and pilot hole each position in turn. Secure using the 2 provided security screws.
- A small bead of Anti-pick sealant (AP110) is recommended to bed the shroud on to the substrate and to also seal around the edges.

Cleaning

- PLA sign, slider & inside backplate: use mild detergent on a damp cloth

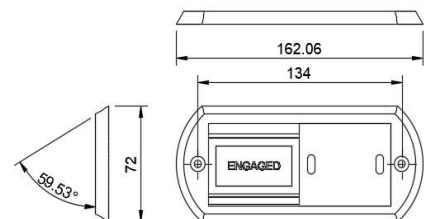

Call: 01253 859407
Email: info@point5plus.co.uk